

POLYURETHANE ADDITIVES FOR FLEXIBLE POLYETHER AND POLYESTER FOAM

SILICONE SURFACTANTS
CATALYSTS
PERFORMANCE ADDITIVES

EUROPE




CONTENTS

EVONIK PU ADDITIVES AT A GLANCE	3
POLYETHER FOAM ADDITIVES	
Conventional Surfactants	4
Universal Silicone Surfactants	5
Introducing Additives to improve the recovery of compressed foam	6
Flame Retardant (FR) Surfactants	7
High Resilience (HR) Surfactants	7
Visco Surfactants	9
Traditional Catalysts	10
Emmission optimized Catalysts	11
Performance Additives	12
ADDITIVES FOR POLYESTER FOAM	
Surfactants	14
Amine Catalysts	15
Performance Additives	15
TEGO® RISE SOFTWARE	16
SUSTAINABILITY AT EVONIK	17

EXPLORE PU – FAST ONLINE SERVICES AND SUPPORT WHENEVER YOU NEED IT!



EXPLORE PU takes our online service offering to the next level; a more personalized experience, with fast access to support from our polyurethane experts, wherever you are in the world.

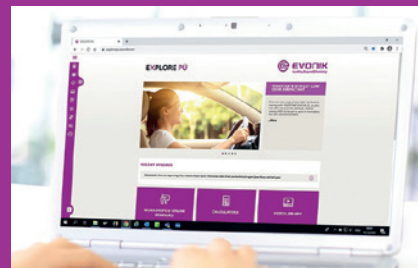


EVONIK – YOUR POLYURETHANE ADDITIVES PARTNER FOR ALL COMFORT FOAM APPLICATIONS

By working in close partnership with the comfort industry, we stay abreast of the latest trends and issues impacting the global market, helping us to meet changing market demands and provide optimized products with the lowest possible VOC emissions.

Over several decades, we have developed a large variety of different specialized products that generate 'value' for our customers, including emission optimized catalysts and low cyclic containing silicone surfactants.

WE ARE WHERE YOU ARE

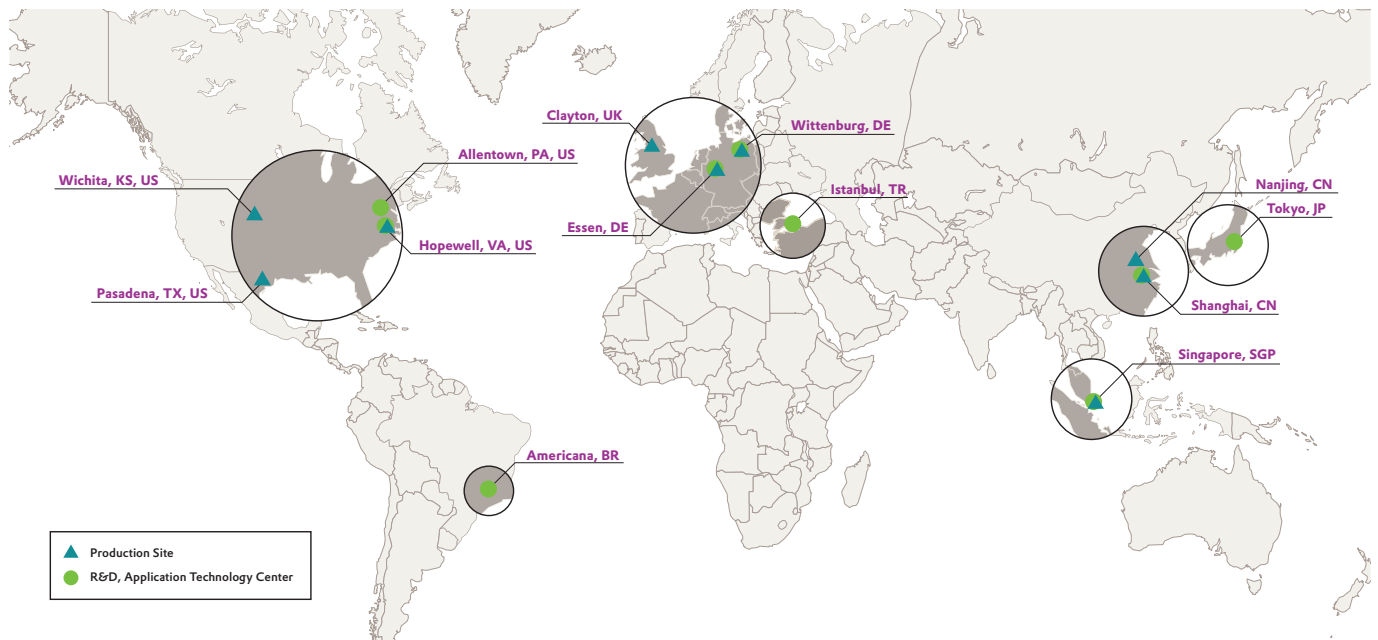

SILICONE SURFACTANTS FOR CONVENTIONAL POLYETHER BLOCK FOAM

All our surfactants are VOC optimized; as a result, the cyclic siloxane (D4, D5 and D6) content is <0.1 wt % in total. For many grades (marked as "ultra-low cyclics"), we have further improved our processes and reduced the total D4, D5 and D6 content down to <0.03 wt %, helping formulators meet stringent IKEA IOS Mat 0010 V 15 emission targets, whilst producing high quality foam.

CONVENTIONAL SILICONE SURFACTANTS

Due to their tailored properties, conventional silicone surfactants are suitable for a broad range of different polyether foam grades. However, they are not recommended for FR (flame retardant) foam grades because they require a higher dosage of flame retardants, or the foam might not even pass FR test.

TEGOSTAB®	KEY FEATURES	STABILIZER POTENCY	DENSITY RANGE	NUCLEATION EFFICIENCY	PROCESSING LATITUDE	ULTRA-LOW CYCLICS ⁽¹⁾	CO ₂ PROCESSING	SENSITIVE TO HYDROLYSIS
B 4900	Very broad processing latitude	•	M	••	•••		✓	✓
B 8002	Very broad processing latitude for high density foams with low stabilization requirements	◦	H	•	•••			✓
B 8040	Medium potency stabilizer with wide processing latitude	••	M	••	•••		✓	✓
B 8052	Improving nucleation while keeping a good processing latitude for a broad range of formulations	•	M	••	•••		✓	✓
B 8266	Narrowing the density distribution within the block while keeping a broad processing latitude	••	M	•••	••	✓	✓	
B 8291	Wide processing latitude & medium to low potency for a broad range of formulations	•	M	••	•••	✓	✓	
BF 2370	Outstanding processing latitude to produce very open foam with fine cell structure. Can be used in an extensive variety of foams including Viscoelastic and Hypersoft foams.	••	L-H	•••	•••		✓	✓
BF 2470	Improved gas yield and excellent density distribution	••	L-M	••	••	✓		


L = Low
M = Medium
H = High

◦ = Low performance or narrow processing latitude
• = Medium performance or medium processing latitude
•• = High performance or wide processing latitude
••• = Very high performance or very wide processing latitude

⁽¹⁾ D4, D5 and D6 content < 0.03 wt % (in total)

UNIVERSAL SILICONE SURFACTANTS

Universal silicone surfactants combine high activity with medium FR properties. They are suitable to produce foams with FR requirements like Cal. TB 117 and MVSS 302. Generally foam manufacturers also use these silicone surfactants for their conventional foam grades.

TEGOSTAB®	KEY FEATURES	STABILIZING POTENCY	DENSITY RANGE	NUCLEATION EFFICIENCY	PROCESSING LATITUDE	ULTRA-LOW CYCLICS ⁽¹⁾	CO ₂ PROCESSING	SENSITIVE TO HYDROLYSIS
B 8158	Broad processing latitude and fine cell structure, specifically for more hydrophobic polyols including Natural Oil-based Polyols	••	L-M	•••	•••	✓	✓	
B 8227	Best combination of wide processing latitude, very fine cell structure, block height, gas yield and surface finish	••	M-H	••	•••	✓	✓	
B 8228	High potency for medium density foams	•••	L-M	••	••	✓		
B 8244	Combination of high potency and good cell opening. Suitable for formulations with hydrophilic / EO-rich polyol	•••	L-M	••	•••	✓		✓
B 8255	Strong nucleation support, fine cell structure and high potency for CO ₂ foams	•••	L-M	•••	••	✓	✓	
B 8271 	High activity surfactant for improved recovery after compression (compression set)	•••	L-M	••	••	✓	✓	
B 8275	Broad processing latitude and good nucleation for medium density foams and foam grades containing NOP	••	M	•••	••	✓	✓	

L = Low
M = Medium
H = High

◦ = Low performance or narrow processing latitude
• = Medium performance or medium processing latitude
•• = High performance or wide processing latitude
••• = Very high performance or very wide processing latitude

✓ = suitable
N/A = not applicable
⁽¹⁾ D4, D5 and D6 content < 0.03 wt % (in total)

INTRODUCING ADDITIVES TO IMPROVE THE RECOVERY OF COMPRESSED FOAM

Particularly for 'mattress in a box', it is paramount that foam recovers well after being compressed. To assist, we have developed a number of additives that can help formulators meet all current performance tests.



TEGOSTAB® B 8271

Conventional ether foam

- Silicone surfactant designed to improve the rate and extend of recovery of original foam shape after compression
- Reduces height loss from compression set and wet compression set
- Provides superior recovery compared to other silicone surfactants, shown for a wide range of foam airflows and formulations
- Universal silicone surfactant, suitable for standard foam flammability tests

ORTEGOL® 70X SERIES

Conventional ether foam

- Additives developed to improve the recovery of flexible foam
- Can be added on top to existing formulations
- ORTEGOL® 700 and ORTEGOL® 702 recommended for bedding applications, with ORTEGOL 702 providing higher efficiency
- ORTEGOL® 701 is optimized to meet automotive emission requirements

FLAME RETARDANT SILICONE SURFACTANTS

Flame retardant silicone surfactants are particularly well-suited for the production of flame retardant foam grades since they enhance the efficiency of the flame retardants by their minimized contribution to the flammability of the foam. They are essential in Crib 5 formulations.

TEGOSTAB®	KEY FEATURES	STABILIZING POTENCY	DENSITY RANGE	NUCLEATION EFFICIENCY	PROCESSING LATITUDE	ULTRA-LOW CYCLICS ⁽¹⁾	CO ₂ PROCESSING	SENSITIVE TO HYDROLYSIS	FR PERFORMANCE
B 8155	Excellent flammability test performance combined with broad processing latitude	••	L-H	••	•••	✓	✓		•••
B 8189	Very broad processing latitude	••	M-H	••	•••	✓	✓		•
B 8232	Medium potency combined with broad processing latitude for various FR formulations	•	M-H	••	•••	✓			••
B 8239	Excellent flammability test performance, fine and regular cell structure	•••	L-M	•••	••	✓	✓		•••

L = Low
M = Medium
H = High

◦ = Low performance or narrow processing latitude
• = Medium performance or medium processing latitude
•• = High performance or wide processing latitude
••• = Very high performance or very wide processing latitude

✓ = suitable
⁽¹⁾ D4, D5 and D6 content < 0.03 wt % (in total)

SILICONE SURFACTANTS FOR HIGH RESILIENCE SLABSTOCK FOAM

Our surfactants for high resilience (HR) foams are specifically designed to cover all of a formulators needs for different cell regulating and stabilizing potencies. Additionally, all products listed below are phthalate free and provide very open foam.

TEGOSTAB®	ACTIVITY	PROCESSING LATITUDE	POLYMERPOLYOL	MDI	TDI	LOW VOC
B 8707 LF 2	••	••	SAN/PIPA	•••	•••	✓
B 8773 LF 2	••	•••	SAN/PHD/PIPA	••	•••	✓
B 8783 LF 2	•••	•••	SAN/PHD/PIPA	••	•••	✓

•• = High performance or wide processing latitude
••• = Very high performance or very wide processing latitude

✓ = suitable

INTRODUCING ORTEGOL® 720

High resilient foam


- New crosslinker providing various benefits for the production of high resilient foam
- Improvement of dry and wet compression sets
- Reduces cold flow, resulting in better block geometry and better distribution of physical properties in foam bun
- Improved EH&S compared to state-of-the-art crosslinkers used in HR foam production
- Can be used in combination with ORTEGOL® 204



MDI VISCOELASTIC SURFACTANTS

The TEGOSTAB® B 8200X products are a range of silicone surfactants that are dedicated and qualified for use in MDI viscoelastic foam grades.

We have tailored the performance of these surfactants to suit the intended foam chemistry, e.g. TEGOSTAB® B 82003 VE is ideal for chemical viscoelastic foams as it provides open cell structures, whereas TEGOSTAB® B 82005 VE is well suited to the production of pneumatic viscoelastic foams with very fine and tight cell structures, while avoiding foam shrinkage. Additionally, all the surfactants in this range have an ultra-low cyclic siloxane content, enabling formulators to meet latest cyclic siloxane emission targets whilst producing high quality foam.

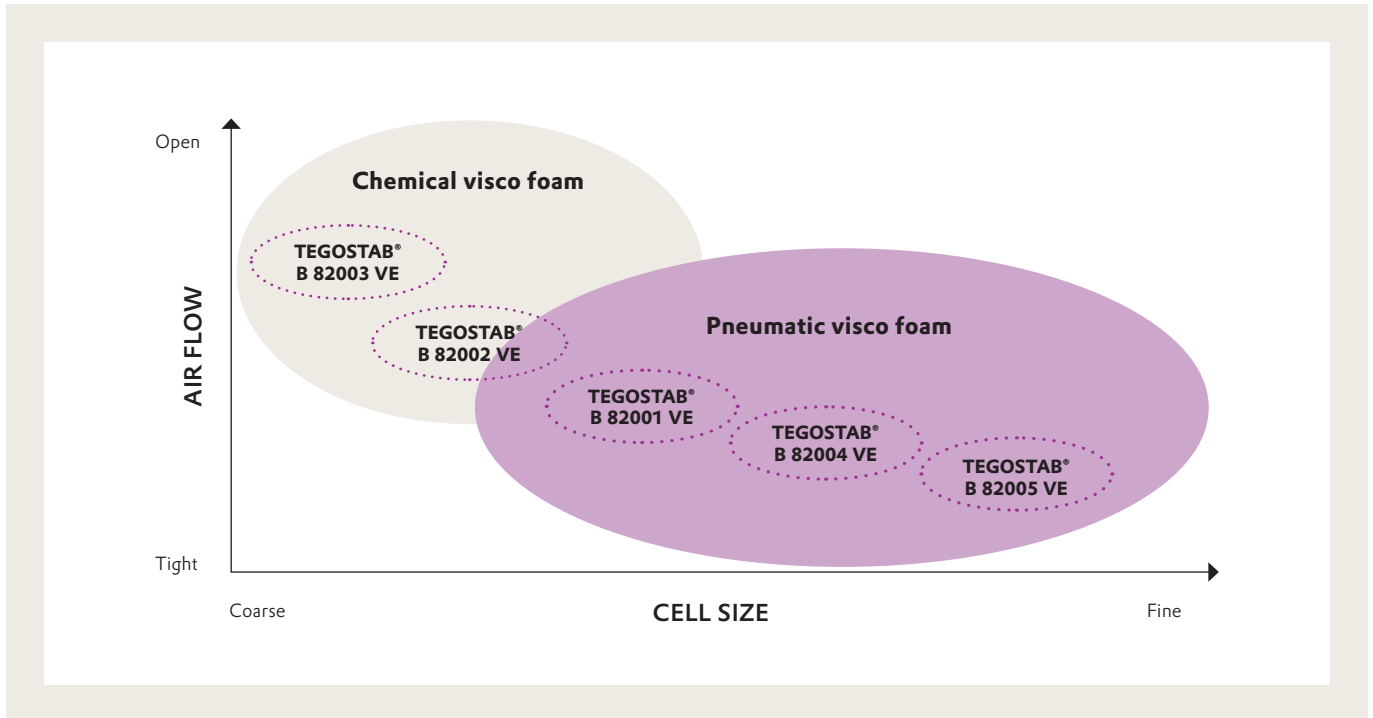



To learn more about our latest product portfolio for viscoelastic foams check out our latest online guide on Explore PU.



CATALYSTS

Evonik is the undisputed global leader of polyurethane additives, offering the broadest range of catalysts to the flexible foam industry.

TRADITIONAL CATALYSTS

	DESCRIPTION
DABCO® 33 LV	Standard gel catalyst based on triethylenediamine in DPG
DABCO® BL 11	Standard blowing catalyst based on bis(2-dimethylaminoethyl)ether
DABCO® BL 13	Blowing catalyst. Diluted version of DABCO® BL 11
DABCO® DMEA	Moderately active blowing catalyst with broad processing latitude
DABCO® BLV	Standard balanced catalyst
KOSMOS® T 9	Stannous octoate
KOSMOS® T 900 	Alternative to stannous octoate, offering improved EH&S
KOSMOS® T 900 LV 	Alternative to stannous octate with comparable viscosity to KOSMOS® T 9
KOSMOS® 54	Co-catalyst for cold flow prevention in HR and viscoelastic foams

INTRODUCING KOSMOS® T 900

KOSMOS® T 900 is a tin catalyst for the manufacture of all types of polyurethane flexible foam.


- Strong gel catalyst
- Alternative to industry standard catalysts such as KOSMOS® T 9
- Improved EH&S profile
- Also available in a low viscosity version KOSMOS® T 900 LV



EMISSION OPTIMIZED CATALYSTS

Our latest Negligible Emissions (NE) grades offer reduced emissions compared to traditional amines, resulting in lower exposure to VOC's for both workers and consumers.

	DESCRIPTION
DABCO® NE 300	Low emission reactive blowing catalyst
DABCO® NE 340	Low emission reactive blowing catalyst allows for precise dosage with all metering systems
DABCO® NE 650	Low emission, reactive balanced catalyst that is biased towards the blow reaction
DABCO® NE 660	Low emission, reactive balanced catalyst that is biased towards the gel reaction
DABCO® NE 500	Low emission reactive gel catalyst
DABCO® NE 1082	Low emission reactive catalyst with improved gel selectivity
DABCO® NE 750	Low emission reactive gel catalyst with outstanding gel selectivity Recommended for viscoelastic and hyper soft foams
KOSMOS® EF	Emission optimized stannous catalyst

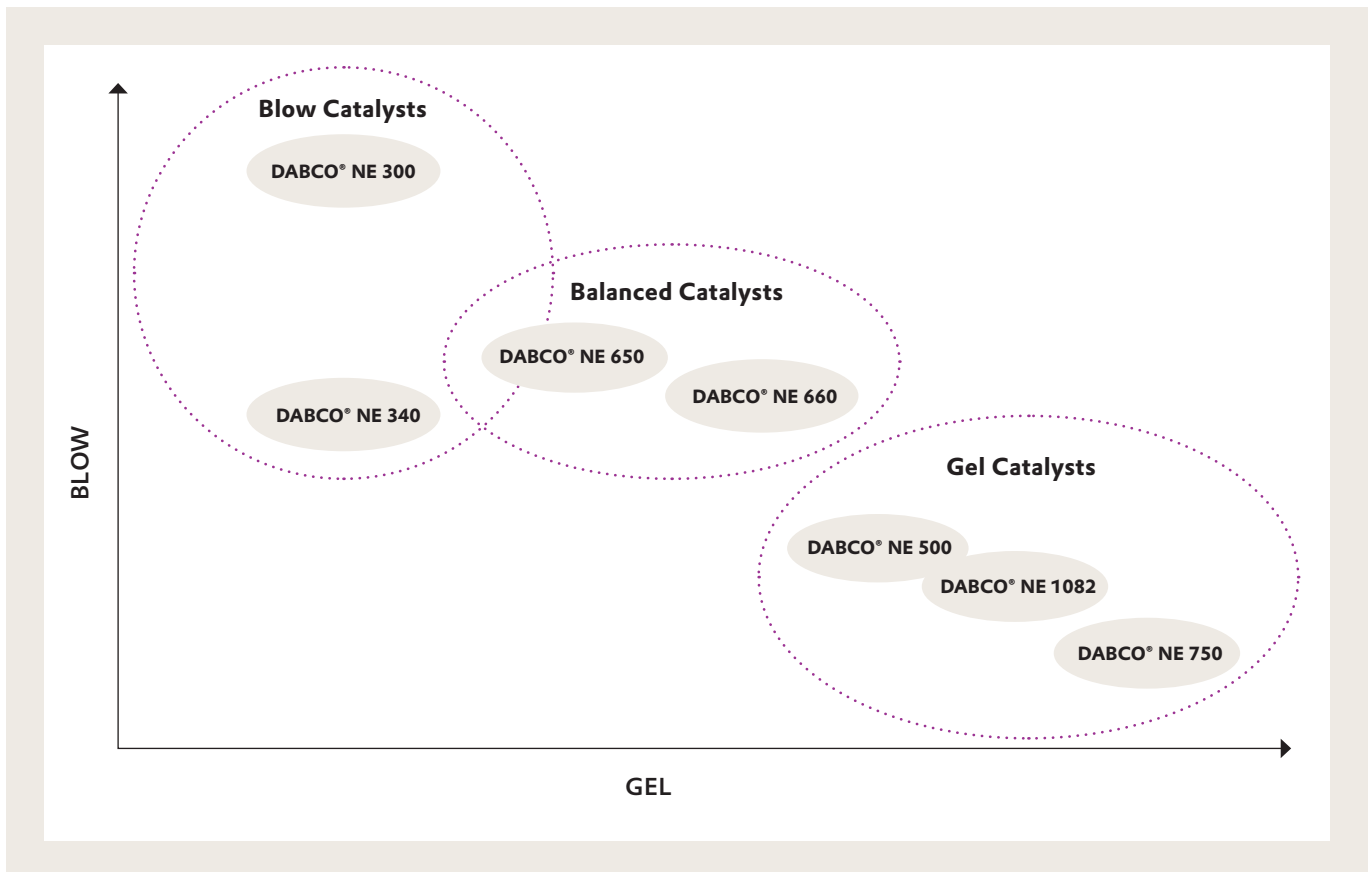

PERFORMANCE ADDITIVES



Evonik's portfolio of Performance Additives can help formulators to improve processing and foam physical properties.

ORTEGOL® CROSSLINKERS AND CHAIN EXTENDERS	PURPOSE
ORTEGOL® 720 NEW	Crosslinker for improved compression set properties of HR foams
ORTEGOL® 204	Additive for cold flow prevention in HR and visco foams
ORTEGOL® G	Highly efficient crosslinker for flexible foams containing fillers
ORTEGOL® CXT	Additive to reduce splits in low index and filler formulations. Also enhances the elongation properties of the foam.
ORTEGOL® HARDENERS AND SOFTENERS	
ORTEGOL® HA 1	Hardening additive with broad processing latitude
ORTEGOL® FS 2	Softening additive to prevent splits in low index formulations
ORTEGOL® 310	Softening additive
OTHER PROCESSING ADDITIVES	
ORTEGOL® NOP	Emulsifier for blends of Natural Oil-based Polyols and standard polyols




ORTEGOL® TO IMPROVE COMPRESSION SET

ORTEGOL® 700	Improving foam recovery after compression and reducing curing time before compression
ORTEGOL® 701	Improving foam recovery after compression. Suitable for automotive applications
ORTEGOL® 702	Improving foam recovery after compression and reducing curing time before compression. Provides excellent recovery in demanding applications

ORTEGOL® FOR ANTI-SCORCHING


ORTEGOL® AO 1	Antioxidant for scorch prevention
ORTEGOL® AO 7	Highly efficient antioxidant for scorch prevention, low VOC, also in high temperature automotive VOC tests

OTHER PROCESSING ADDITIVES

DABCO® BA 100	Acid-based blocking agent for delaying cream time to reduce or eliminate pinholes in foams
DABCO® PE 40	Additive to stabilize dispersions of solid powder particles in polyol and emulsifier for incompatible polyol blends
ORTEGOL® 500	Cell opening additive for technical flexible foams
ORTEGOL® AST	Antistatic additive
ORTEGOL® AST 2	Antistatic additive with reduced tendency for scorch
ORTEGOL® BS 1	Wetting agent for rebonded foam production to reduce binder level
ORTEGOL® CC 3 	Cell coarsener for HR, visco and standard ether foams
ORTEGOL® HPH 1	Additives to enhance the wetting of foam by liquids, especially water
ORTEGOL® LA 2	
ORTEGOL® LA 3	Aldehyde scavengers
ORTEGOL® VCO	Cell opener for viscoelastic foams
TEGOCOLOR® color pastes	Coloring additives

ADDITIVES FOR POLYESTER POLYURETHANE FOAM

SURFACTANTS
CATALYSTS
PERFORMANCE ADDITIVES

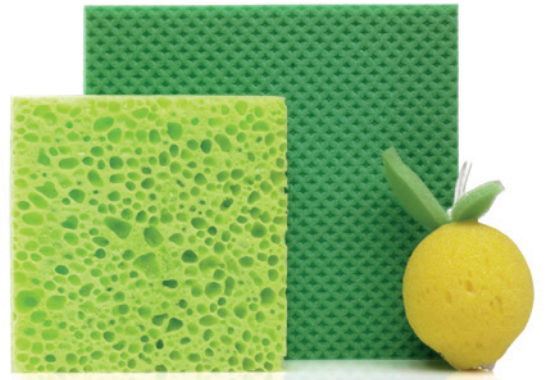

SURFACTANTS

Silicone surfactants are strong stabilizers, which help produce fine and regular cell structures over a wide range of densities.

Organic surfactants are recommended for formulations that need to pass flammability tests or must be clickable.

All our surfactants are VOC optimized.

TEGOSTAB®	KEY FEATURES	DENSITY RANGE	FR FORMULATIONS	SEMI RIGID	LOW VOC
B 8300 CL	Silicone surfactant for standard foams with open and regular cell structure	M			✓
B 8301 CL	Silicone surfactant for high density foams with extremely open and regular cell structure	M-H			✓
B 8325	Silicone surfactant with very high stabilizing efficiency for standard and semi rigid foams	L-M		✓	✓
B 8330	Silicone surfactant with high stabilizing efficiency for standard and semi rigid foams	L-M		✓	
B 8336 <small>NEW</small>	Silicone surfactant with high stabilizing efficiency for standard and semi rigid foams	L-M		✓	✓
B 8383	Silicone surfactant for low density FR foams with very uniform fine cell structure	L-M	✓		✓
B 8356	Organic surfactant for FR foams with improved die-cuttability. Recommended for automotive applications	M	✓		✓
B 8357	Organic surfactant for FR foams with improved emulsification (compared to TEGOSTAB® B 8356). Recommended for activator blends	M	✓		✓

L = Low M = Medium H = High ✓ = suitable

AMINE CATALYSTS

	DESCRIPTION
TEGOAMIN® E 5	Balanced catalyst promoting the cell opening
TEGOAMIN® E 10	Promotes the blow reaction; broad processing for open celled foam grades
TEGOAMIN® E 12	High potent, balanced catalyst with excellent surface curing properties
DABCO® NE 400	Emission optimized and low odor balanced amine catalyst
DABCO® B 16 E	Used as co-catalyst to promote the gel reaction


PERFORMANCE ADDITIVES



Evonik's portfolio of Performance Additives can help formulators to improve processing and foam physical properties.

PRODUCT	PROPERTIES
ORTEGOL® AO 2	Antioxidant optimized for ester foams, no textile staining
ORTEGOL® AO 7	High efficiency antioxidant with very low VOC contribution, no textile staining
ORTEGOL® 315	Improves emulsification, minimizes the physical property spread
ORTEGOL® 701	Improving foam recovery after compression. Suitable for automotive applications
ORTEGOL® CLA 2	Improving foam clickability
ORTEGOL® HPH 1	Additives to enhance the wetting of foam by liquids, especially water

AT EVONIK WE GO BEYOND CHEMISTRY TO CREATE INNOVATIVE AND SUSTAINABLE SOLUTIONS FOR OUR CUSTOMERS

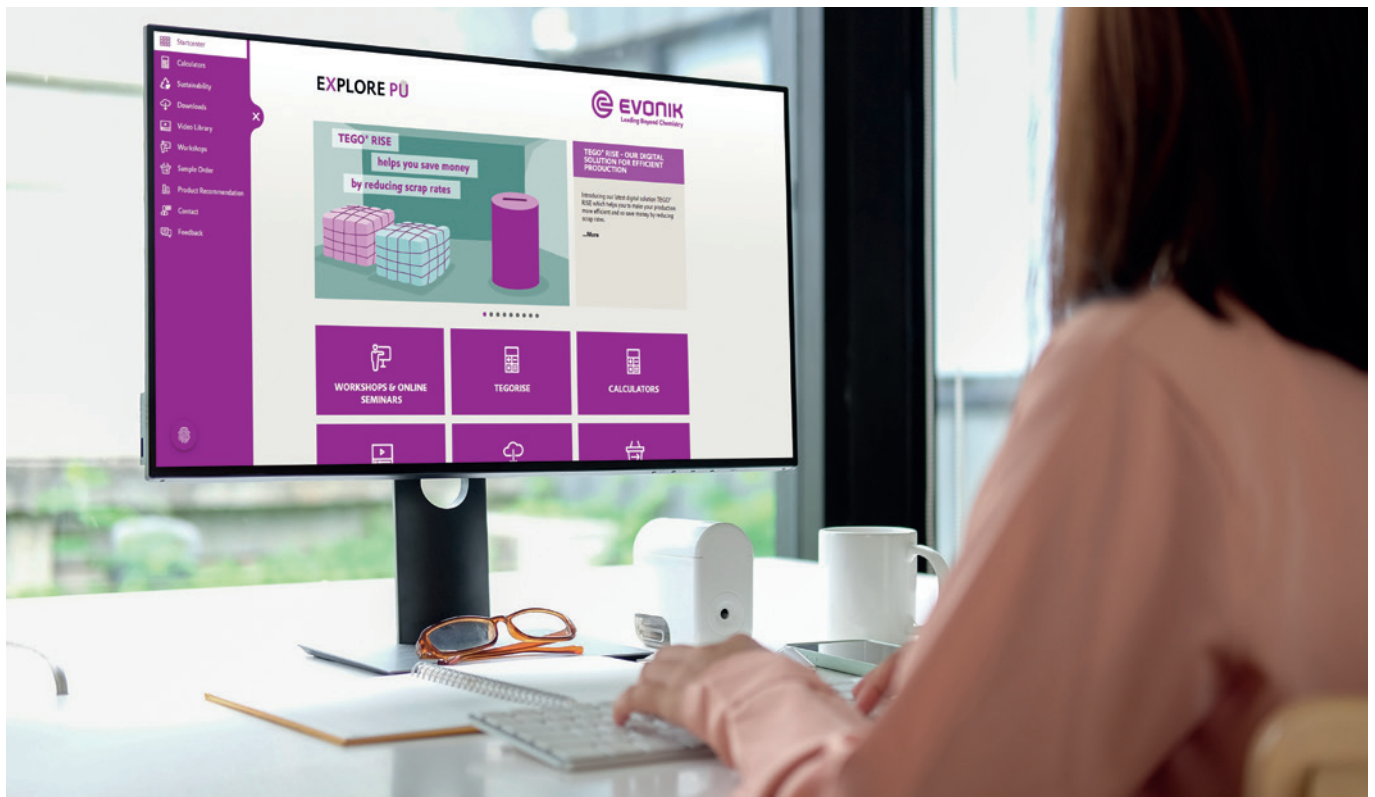

TEGO® RISE SOFTWARE: APPLICATION TECHNOLOGY KNOW-HOW AVAILABLE 24 / 7

- New software tool from Evonik to improve block foam production by optimizing machine setting parameters
- TEGO® RISE helps to reduce production waste and costs
- High simulation quality based on advanced algorithms and experimental data
- TEGO® RISE can help foamers to introduce new formulations faster with reduced number of required trials

EVONIK SUSTAINABLE SOLUTION AREAS

FIGHTING CLIMATE CHANGE



- Products with **reduced carbon footprint**
- **Reduced scrap rate** during foam production



DRIVING CIRCULARITY



- **PU recycling** concepts and processes
- High performance additives and robust processes designed for **recycling PU components**
- **Bio-based products**



SAFEGUARDING ECOSYSTEMS



- **Environmentally benign** PU production processes
- **Reduction of critical components** in PU production



ENSURING HEALTH & WELLBEING



- **Reduced emission** levels in PU foam
- **Increased performance**



Sustainability is taken seriously at Evonik; to learn more about the areas we are focusing on, take a look at our Sustainability Corner at Explore PU.



EVONIK CONTINUES TO INVEST IN NEW SITES & EQUIPMENT, TO SUSTAINABLY DELIVER THE BEST SOLUTIONS AND SERVICES TO THE FLEXIBLE FOAM INDUSTRY

ISCC+ CERTIFICATION

Evonik is committed to helping you produce high-quality foams, whilst minimizing the impact on the environment!

- With our Low Carbon Footprint (LCF) surfactants, we support your portfolio transformation towards more sustainable solutions
- ISCC+ certification for our Essen surfactant production site provides you with traceability along the supply chain
- Certified products will be available from Q2-2024 onwards



HOME OF POLYURETHANE, TÜRKIYE

- Lab and training center to work in collaboration with customers
- Small scale production, technical and digital services to support formulation development and optimization
- State of the art technical equipment to evaluate foam performance and run quality tests



TWO HIGH PRESSURE FOAMING MACHINES IN ESSEN, GERMANY

- One is dedicated to ester foam
- The second one is suitable for all other slab foam grades including conventional ether, CME, visco, HR, soft and CO₂ foam grades.
- Both machines are designed to help customers
 - develop new formulations
 - troubleshoot technical issues
 - transition smoothly to new materials or technologies from Evonik

OUR COMMITMENT

Evonik is committed to producing new additives that improve productivity, enhance performance and have a reduced impact on the environment and CO₂ footprint. We have strict quality management processes in place as well as many diversity initiatives.

Our products are backed by a global network of support services:

- Local sales & technical service personnel, with in-depth industry knowledge and understanding of your needs.
- Dedicated R&D centers of excellence.
- Analytical labs
- Worldwide manufacturing and warehouse capabilities.



We are the global leader in polyurethane additives offering you the broadest choice of catalysts and surfactants for your flexible slabstock foam applications.

From our TEGOSTAB®, DABCO®, TEGOAMIN®, KOSMOS®, ORTEGOL® and TEGOCOLOR® brands you will find the right additives for your foam formulation.

SAFETY IS PARAMOUNT AT EVONIK

- Evonik is one of the safest chemical manufacturers globally.
- An industry leader environmental, health and safety (EH&S) performance.
- Every employee is required to understand and adhere to our global EH&S policy. It is a condition of employment.

To further discuss your requirements for polyurethane additives for the comfort foam industry, or to learn more about regional product availability.

Please visit:

www.evonik.com/pu-contacts

Evonik Operations GmbH
Goldschmidtstraße 100
45127 Essen
Germany
Phone +49 201 173-3006
polyurethane@evonik.com
www.evonik.com/pu-additives

This information and any recommendations, technical or otherwise, are presented in good faith and believed to be correct as of the date prepared. Recipients of this information and recommendations must make their own determination as to its suitability for their purposes. In no event shall Evonik assume liability for damages or losses of any kind or nature that result from the use of or reliance upon this information and recommendations. EVONIK EXPRESSLY DISCLAIMS ANY REPRESENTATIONS AND WARRANTIES OF ANY KIND, WHETHER EXPRESS OR IMPLIED, AS TO THE ACCURACY, COMPLETENESS, NONINFRINGEMENT, MERCHANTABILITY AND/OR FITNESS FOR A PARTICULAR PURPOSE (EVEN IF EVONIK IS AWARE OF SUCH PURPOSE) WITH RESPECT TO ANY INFORMATION AND RECOMMENDATIONS PROVIDED. Reference to any trade names used by other companies is neither a recommendation nor an endorsement of the corresponding product, and does not imply that similar products could not be used. Evonik reserves the right to make any changes to the information and/or recommendations at any time, without prior or subsequent notice.



<https://explorepu.evonik.com>

03/2024